


Lexmark E350d and E352dn

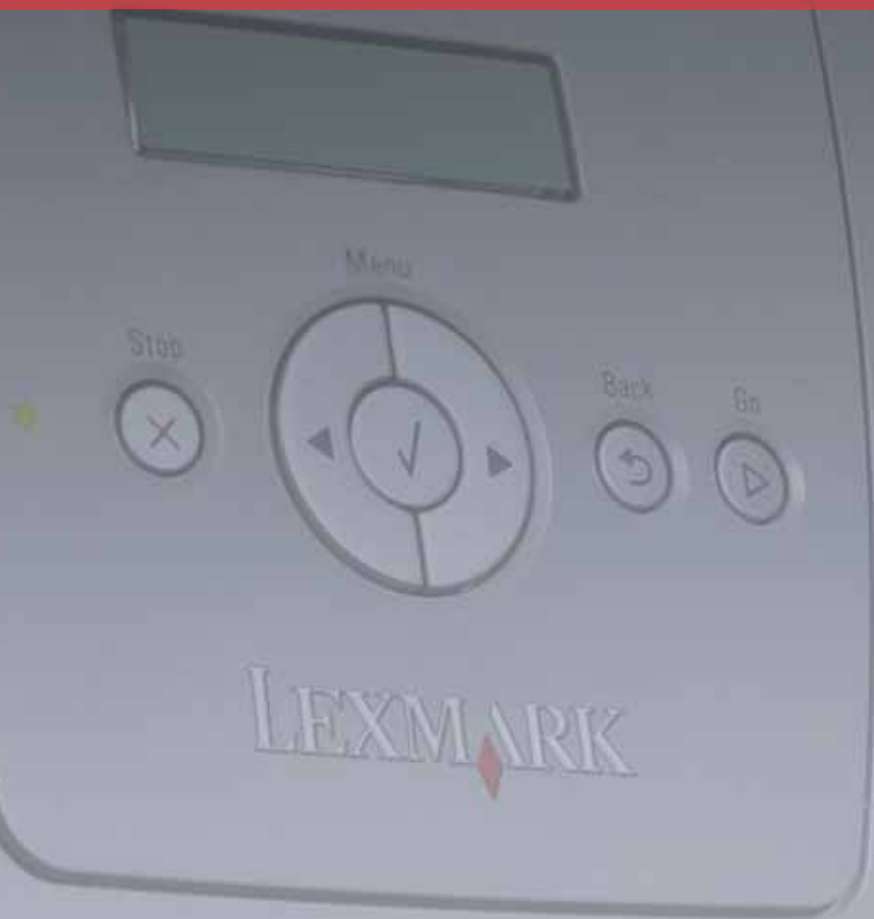

LEXMARK[™]

Lexmark E350d, E352dn

The Lexmark E350d and E352dn are affordable, space-saving, monochrome laser printers with duplex standard. Their 366 MHz processor and 32MB of standard memory provide high-quality printing at up to 35 ppm.



Lexmark E350d, E352dn

In the Box

Lexmark E350d

- Lexmark E350d printer
- 1,500-page Starter Return Program Toner Cartridge¹
- Photoconductor Kit (up to 30,00 pages)
- Dust Cover
- Automatic two-sided printing
- Power Cord

- Combined Drivers, Utilities and Publications CD
- Setup Sheet, Safety Notices, Supplies Return Program Flyer

Lexmark E352dn

- Lexmark E350d printer **EXCEPT** 3,000-page starter Return Program Toner Cartridge¹ **PLUS** Ethernet

Product Specifications

Part Number	US/Canada: E350d: 33S0400; E352dn: 33S0500
Product Class	Desktop laser printer
Speed	Up to 35 ppm
Time to First Page	As fast as 6.5 seconds (standby and power saver modes)
Print Resolution	1200 x 1200 dpi, 2400 image quality printing; 1200 image quality printing; 600 x 600 dpi
Processor	366 MHz
Memory (std./max.)	32MB/160MB
Connectivity*	
Standard	E350d: Parallel, USB; E352dn: Parallel, USB, Ethernet
Optional	E350d: Ethernet, Wireless, Gigabit Ethernet; E352dn: Wireless, Gigabit Ethernet
Printer Languages	PostScript 3, PCL 6 emulations, PPDS Migration Tool
Fonts*	PCL: 89 scalable, including OCR-A, OCR-B and code 3 of 9 bar codes; 2 bitmapped; PostScript: 89 scalable
Operating Systems*	Windows, Mac, Novell (E352dn only), UNIX, Linux
Acoustics	Printing: 52 dBA; Quiet mode: 48 dBA; Idle: inaudible
Size (WxDxH)	15.6 in. x 14.1 in x 10.2 in. (396 mm x 359 mm x 259.5 mm)
Weight	25 lb. (11.4 kg)
Duty Cycle	35,000 pages (Maximum usage per month)

Media Specifications

Paper Capacity (sheets)	
Standard	Input: 250 + 1; Output: 150 + 1
Maximum	Input: 801 (250 + 550 + 1); Output: 150 + 1
Paper Sources	
Standard	Input: 2; Output: 1 top, 1 rear
Maximum	Input: 3; Output: 1 top, 1 rear
Media Information	
Types	Plain paper, card stock, transparencies, paper labels
Size	Letter, legal, executive, folio, statement, A4, A5, A6, JIS B5, universal (3 x 5 in. to 8.5 x 14 in.), envelopes (7 ³ / ₄ , 9, 10, DL, C5, B5)
Weight	Plain paper: 16 to 43 lb. (60 to 163 g/m ²); Card stock: up to 90 lb. (199 g/m ²)


Shipping Dimensions

Lexmark E350d, E352dn
 Size: 18.5 x 16.9 x 14.9
 Weight: 29.2 lb.



Part Numbers

Supplies	3,500-page Return Program Toner Cartridge ¹	E250A11A
	3,500-page Toner Cartridge ¹	E250A21A
	9,000-page High Yield Return Program Toner Cartridge ¹	E352H11A
	9,000-page High Yield Toner Cartridge ¹	E352H21A
	30,000-page Photoconductor Kit ²	E250X22G
Memory Options	32MB SDRAM	1021257
	64MB SDRAM	1021258
	128MB SDRAM	1021259
	32MB Flash Card	1021208
Warranty*	1-year Advanced Exchange (3-5 business days)	Base
	Upgrade of Base Warranty to Advanced Exchange next business day	2349195
	1-year Advanced Exchange next business day extended warranty	2349129
	2-year Advanced Exchange next business day extended warranty	2349130
	Upgrade of Base Warranty to Onsite Repair	2349136
	1-year Onsite Repair extended warranty	2349137
	2-year Onsite Repair extended warranty	2349138
	Upgrade of Base Warranty to Onsite Exchange next business day	2349145
	1-year Onsite Exchange next business day extended warranty	2349146
2-year Onsite Exchange next business day extended warranty	2349147	

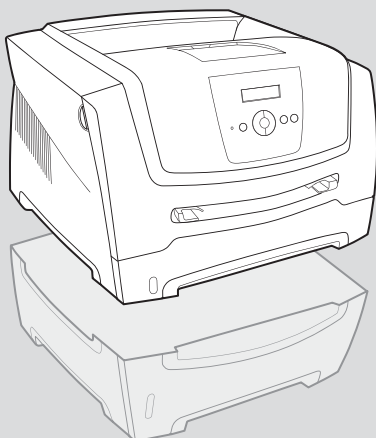

- Single-sheet Slot (standard)
- 250-sheet Drawer (standard)
- Duplex (standard)
- 550-sheet Drawer (28S0803)

¹ Declared standard yield value in accordance with ISO/IEC 19752
² Yield based on approximately 5% coverage

Additional Part Numbers

Solutions	Korean Font Card	1021240
	Simplified Chinese Font Card	1021241
	Traditional Chinese Font CArd	1021242
	Japanese Font Card	1021243
Connectivity	External Print Servers	
	Lexmark MarkNet™ N7000e Fast Ethernet - 1 port ¹	14T0230
	Lexmark MarkNet N7020e Gigabit Ethernet - 4 port ¹	14T0220
	Lexmark N7002e Fast Ethernet - 1 port ²	14T0240
	Lexmark N4000e Print Server ¹	14T0030
	Wireless Print Adapters	
802.11g Print Adapter ³	1010042	
Lexmark N4050e 802.11g Print Server ¹	14T0145	
Cables	10-foot Parallel Cable	1021231
	6-foot USB Cable	1021294
Media	Lexmark Laser Transparencies	70X7240



Specializing in Retail Control Systems Since 1967

For more information contact us at:

STCR Business Systems, Inc.

10 Prospect Street, Endwell, NY 13760

Phone: (800)776-6576

Fax: (607)757-9202

Email: sales@stcr.com

Web: www.stcr.com

An **IBM Premier** Business Partner

Terms & Conditions

Lexmark, MarkNet and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. PCL is a registered trademark of Hewlett Packard Company. The USB logo is a trademark of Universal Serial Bus Implementers Forum, Inc. All other trademarks are the property of their respective owners. © 2006 Lexmark International, Inc. All rights reserved.

71K1601



¹ Requires USB connection
² Requires Parallel connection
³ E352dn only